



### PARTS AND HARDWARE

FOR A TYPICAL ASSEMBLY

**ZINTRA STICKS** 

NARROW STICK - (12)



#### NARROW MOUNTING STICK - (12)



WIDE STICK - (10)

WIDE MOUNTING STICK - (10)

(3 PER STICK) CABLES WITH SWAGED END, AND BARREL

(3 PER STICK)

ADJUSTABLE

FASTENER



(3 PER STICK) 1/4" -20 HANGER BOLT




(FOR USE WITH WOOD SUBSTRATE ONLY)

#### TOOLS NEEDED

FOR A TYPICAL ASSEMBLY

SPIRIT LEVEL




HOT GLUE GUN



TAPE MEASURE







OPTIONAL:

(3 PER STICK)

**CUP HOOK** 

SUITABLE SCREWS FOR DIFFERENT SURFACES - (50) SCREWS ARE NOT INCLUDED - INSTALLER TO SUPPLY BASED ON FIXING SUBSTRATE






STEP 1

INDEPENDENT STICK INSTALL

INSERT ZINTRA INDEPENDENT NARROW OR WIDE STICK INTO NOTHES USE HOT GLUE TO SECURE. AS SHOWN.

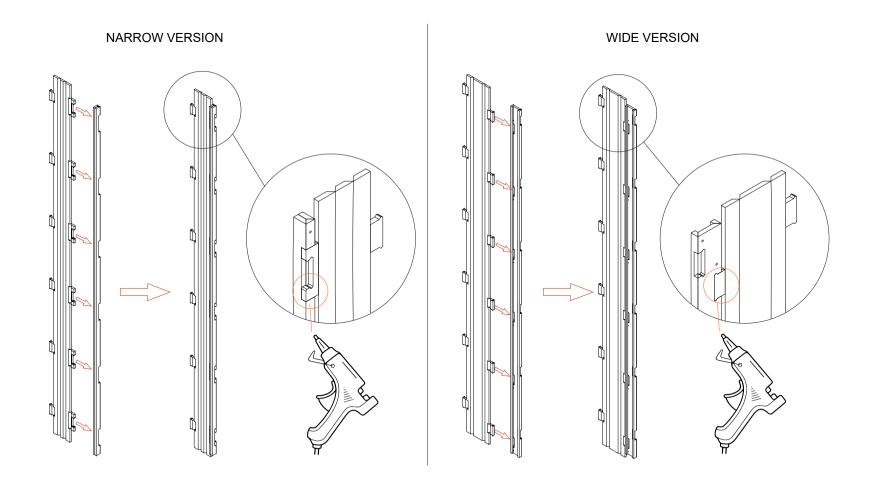




STEP 2

INDEPENDENT STICK INSTALL

FOLD INDEPENDENT NARROW OR WIDE STICK AROUND THE MOUNTING STICK AND INSERT INTO NOTHES ON OTHER SIDE USE HOT GLUE TO SECURE. AS SHOWN.

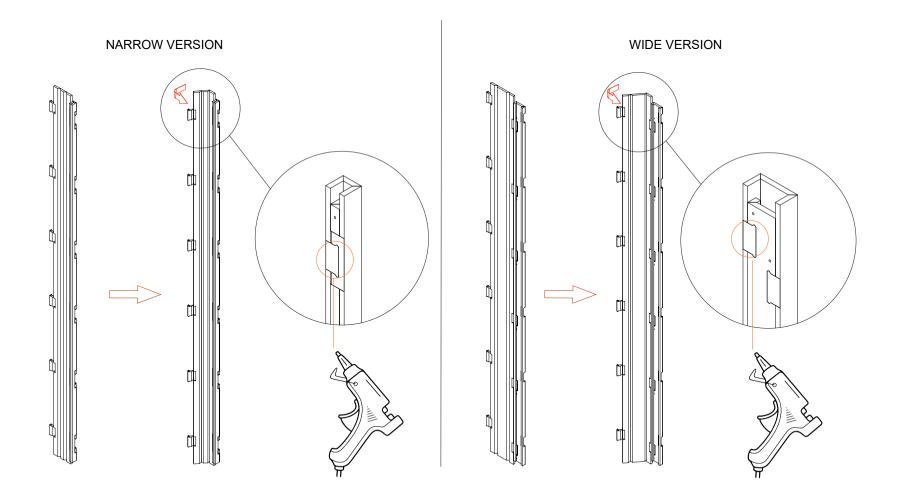




STEP 3

INDEPENDENT STICK INSTALL

MARK HANGER LOCATION ON INDEPENDENT STICK CORRESPONDING TO AVAILABLE HANGING LOCATIONS IN CEILING. NOTE: CABLES MUST HANG PLUMB.

SCREW CUP HOOKS INTO INDEPENDENT STICKS AT THESE LOCATIONS.


RECOMMENDED SPACING.

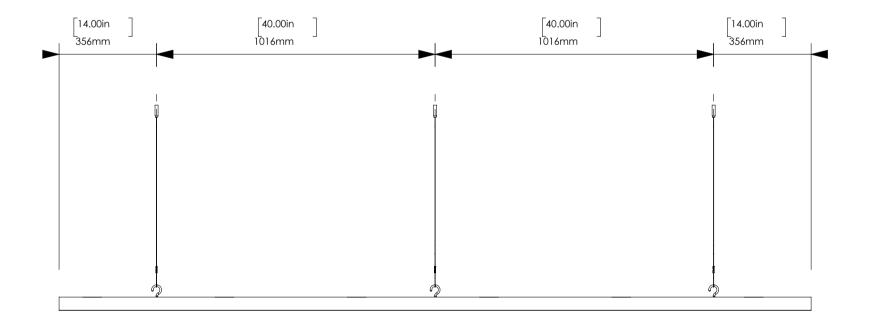




STEP 4

INSTALL THE 1/4"-20 HANGER BOLTS TO THE SUBSTRATE. THE SUPPLIED HANGER BOLTS ARE INTENDED FOR USE IN WOOD ONLY. FOR OTHER SUBSTRATES THE INSTALLER WILL NEED TO SOURCE THE APPROPRIATE HARDWARE.



2.2 IDENTIFY THE THREADED END OF THE BARREL AND THE SWAGE END OF THE CABLE. INSERT THE PLAIN WND OF THE SUPPLIED WIRETHROUGH THE LARGE THREADED END OF THE BARREL UNTIL IT IS FULLY SEATED IN THE BARREL. ATTACH THE THREADED END OF THE BARREL TO THE 1/4"-20 HANGER BOLT.






#### STEP 5

A. IDENTIFY THE THREADED END OF THE BARREL AND THE SWAGE END OF THE WIRE.

B. INSERT THE PLAIN END OF THE SUPPLIED WIRE THROUGH THE LARGE THREADED END OF THE BARREL UNTIL THE SWAGE END IS SEATED IN THE BARREL.

C. ATTACH THE THREADED END OF THE BARREL TO 1 / 4"-20 HANGER BOLT.

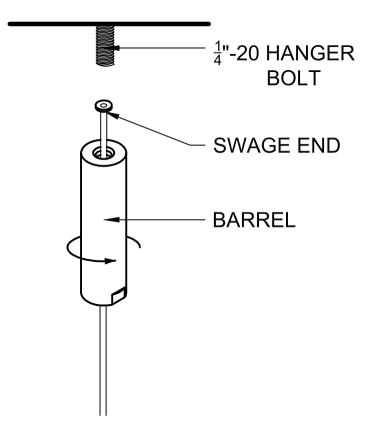




STEP 6

A. INSERT THE PLAIN END OF THE SUPPLIED WIRE THROUGH ONE SIDE OF THE ADJUSTABLE FASTENER

B. REINSERT THE PLAIN END OF THE WIRE INTO THE REMAINING SIDE OF THE ADJUSTABLE FASTENER AND ADJUST TO MAKE A LOOP

C. HANG THE BAFFLES BY THE CUP HOOKS THROUGH THE LOOPS CREATED

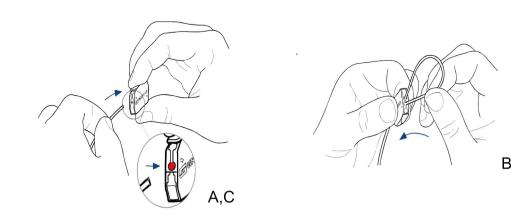

#### STEP 7

ONCE THE INDEPENDENT STICK IS PROPERLY SUSPENDED AND LEVEL IS CHECKED USING A SPIRIT LEVEL, ENSURE THE CABLE TENSION IS ALL EQUAL AND NO BOWING IS OCCURRING

TRIM THE EXCESS WIRE WITH WIRE CUTTERS

NOTE: WIRE IS INDEFINITELY ADJUSTABLE BY DEPRESSING TAB ON APPROPRIATE SIDE

